

(양식 1)

【 고분자학회 학회상 포상 지원서 】

[표지]

공모분야	신진학술상				
지원자 인적사항	성 명	한 글	여 현 옥	영 문	HYEONUK YEO
		한 자	呂 鉉 旭		
	소속기관	기관명	경북대학교		
		부서명 (학과명)	화학교육과	직위/직급	부교수
	주 소	대구광역시 북구 대학로80 경북대학교 화학관			
업적요지	○ (주요연구분야) 합성적 측면에서의 기능성 고분자 개발에 관한 것으로, 2017년 박사학위 취득 후 독립 연구자로서 '<u>액정의 자기조립 현상에 기반한 기능성 열경화성/비트리머 수지의 설계 및 합성에 관한 연구</u>'를 수행하고 있습니다. - 열경화성 수지 분야에서 새로운 기능성 물질 합성 방법의 신진 연구자로 다양한 원천 소재 물질을 개발하여 현재까지 Macromolecular Research 7편, Polymer-Korea 1편 포함 73편의 국제 학술 논문을 출판하였고, 45건의 국내외 등록특허를 보유하고 있습니다. 기능성 부여를 위한 고분자 수지에 대한 분자 설계를 시작으로 실제 물질의 유기 합성, 고분자화 반응 및 가공법, 개발품의 응용에 걸친 것으로, 전반적 연구 업적은 고분자 합성-기능성 고분자 분야의 학문 발전에 미력하나마 기여를 하고 있는 것으로 생각합니다. ○ (대표업적) <u>친환경성과 기능성을 겸비한 열경화성 수지에 관한 원천 소재 물질 및 기술 연구에 관한 것으로 Adv. Mater., ACS Macro Lett., Chem. Eng. J. 등 고분자과학/공학 분야의 우수 학술지에 논문을 출판</u>하였습니다. 이를 통해 전기전자, 기계소재, 우주항공 등 첨단 산업에 널리 활용되는 열경화성 수지의 열적, 전기적, 기계적 특성의 강화에 연결되는 핵심적인 개발 전략을 제시하였습니다. 특히, 영구적 화학 결합으로 인해 재활용이 곤란한 열경화성 수지에 동적 화학 결합을 도입하는 것으로 재가공 및 재활용이 가능한 분자 설계 사례를 다수 제시하여 국가연구개발 우수성과 100선에 선정되는 등 새로운 친환경성-기능성 양립 방법론을 선도하였습니다. ○ (학회 활동) 2013년부터 정회원으로 정기총회/지부/부문위원회 등에서 5건의 초청 발표 및 30건 이상의 지도학생 발표를 진행하였고, 2019춘계/2022추계 세션 오가나이저, 2025년부터는 운영이사 및 학술운영위원으로 활동하고 있습니다. ○ (요약) 기능성 유기 소재 분야의 유망 신진연구자로, 친환경성-기능성 양립 소재 개발 전략 제시를 통해 국내 소재 원천기술 발전에 기여하였습니다. 이에 한층 진보된 연구를 통해 고분자과학/공학/재료 분야에 학술적 기여를 하고, 우리 학회 발전에 도움이 되는 신진연구자가 될 수 있도록 절차탁마하고자 합니다.				
상기와 같이 고분자학회 학회상 포상을 지원합니다.					
2025. 8. 15.					
기관명 : 경북대학교 직 위 : 부교수 지원자 : 여 현 옥 (직인)					

(양식 2)

1. 인적사항

가. 학력사항 (대학교 이상만 기재)

기 간	학 교 명	전공 및 학위, 지도교수
2016.11~2017.03	Kyoto University	Polymer Chemistry, 박사, Yoshiki Chujo
2011.04~2013.03	Kyoto University	Polymer Chemistry, 석사, Yoshiki Chujo
2007.04.~2011.03	Kyoto University	Industrial Chemistry, 학사, Yoshiki Chujo

나. 경력사항 (5개 이내 기재)

기 간	기관명(직위, 직책 등)
2017.09~현재	경북대학교(조교수, 부교수)
2013.04~2017.08	한국과학기술연구원(연구원)

다. 수상경력 (최근 3년 이내)

※ 정부 포상, 민간 포상 등 연구개발 업적 관련 수상경력 모두 기재

일 자	수 상 내 용	시 상 기 관
2024년 11월 29일	학술연구지원사업 우수성과 50선	교육부
2025년 1월 23일	국가연구개발우수성과 100선	과학기술정보통신부

2. 수상후보자 추천인단 명부

성 명	전 공 분 야	세부전공 분야	소 속	비고
구본철	고분자화학	고분자복합재료	한국과학기술연구원	별도 송부
김병수	고분자화학	고분자합성	연세대학교	별도 송부
박치영	고분자공학	기능성고분자	대구경북과학기술원	별도 송부

3. 대표논문의 연구업적 요약서

○ (성과 요약)

- 열경화성 수지는 우수한 물성으로 다양한 산업에 활용되지만, 비가역적 가교 구조로 인해 재가공 및 재활용이 어려워 환경 문제를 야기함. 이의 해결을 위해 **지원자는 자기조립이 가능한 반응성 액정에 동적공유결합을 활용한 기능성 비트리머 수지에 대한 설계 방안을 다수 제시**하였음. 이러한 성과는 친환경성과 고기능성을 동시에 갖춘 고분자 소재의 가능성을 보여주는 것으로 과기부 국가연구개발우수성과 100선 및 교육부 학술연구지원사업 우수성과 50선에 선정되는 등 대외적 인정을 받고 있음.

- *Adv. Mater.* (2023)에 보고한 **에폭시계 비트리머 수지**는 2종의 동적가교 결합 (에스터 및 이민)을 도입하여 경화 후 130℃에서 재가공이 가능하며, 액정의 자기조립에 기인하는 **높은 열전도도**를 나타내었음. 또한, 수계 조건에서 이민의 화학 분해를 통해 **원료 회수 및 재경화**가 가능하고, **재활용 후 일부 물성이 오히려 향상되는 등 closed-loop recycling의 분자 설계-합성-공정-응용 전 과정을 성공적으로 시연**하였음.

- *ACS Macro Lett.* (2024)에 **bismaleimide(BMI)를 중합성 작용기로 하는 경질 비트리머에 대한 최초 개발 사례를 보고**한 바 있음. BMI 수지는 극한환경용의 고성능 수지로 비트리머화된 보고 사례가 이전에 없었으나, 본 보고에서는 **300도 이상의 유리전이온도 및 우수한 기계적 특성**을 가지며 동적가교결합(에스터 및 아마이드)에 의한 반복적 재가공이 가능한 BMI 비트리머를 성공적으로 시연하는 것에 성공하였음.

- *Chem. Eng. J.* (2025)에는 2작용기성 에폭시로 대표되는 열경화성 시스템에 1작용기성 에폭시를 일정량 도입하여 가교 밀도를 제어함과 동시에 중합성 액정의 자기조립현상 최적화에 대한 결과를 발표하였음. 중합성 액정 기반의 2작용기성 열경화성 수지는 경화 반응 과정에서 비정질화가 발생하여 자기조립 극대화가 용이하지 않으나, 1작용기성 성분의 제어를 통해 분자 조립 최적화 및 기능성 극대화를 달성하였음.

○ (우수성): 비트리머는 기존 열경화성 수지의 재가공 및 재활용 한계를 극복할 수 있는 차세대 소재로 큰 관심을 받고 있음. 하지만 대부분의 기존 연구는 연질 고분자에 기반하거나 상용 단량체 사용에 한정되어 기능성과 친환경성의 양립이라는 핵심 문제를 해결하지 못하고 있음. 본 성과는 아래와 같은 우수성을 바탕으로, **액정 유래 고기능성과 친환경성을 동시에 구현한 경질 비트리머의 선도적 시연 사례**로 볼 수 있음.

- **단량체 설계부터 재활용까지 완전한 유기소재 개발 프로세스 시연**: 기존 연구 대부분이 상용 단량체에 의존하는 반면, 본 연구는 중합성 액정을 설계-유기합성하여 분자 수준에서 기능성과 친환경성을 동시에 구현 가능하도록 설계함. 단량체 합성 → 경화 시스템 구축 → 재가공 및 화학적 분해 → 재경화(재활용)까지 소재 개발의 전 주기를 아우른 실험 기반 연구로, 기존 문헌과 명확히 구분되는 원천성을 가짐.


- **정밀한 화학 구조 분석으로 신뢰성 있는 검증 확보**: 비트리머의 화학 구조 변화는 일반적으로 간접적 점탄성 측정이나 FT-IR 분석에 그치나, 본 연구는 NMR, MS, FT-IR, NIR 등 정량적이고 직접적인 분광학적 분석법을 체계적으로 병행하여 가교 구조 변화의 정확한 확인을 수행함. 이는 비트리머 연구에서 표준화되지 않은 분석 체계를 새롭게 제시한 사례로, 후속 연구에도 큰 참고가 될 수 있음.

- **연질 중심 기존 연구와 달리, 산업적 수준의 경질 소재 구현**: 기존 자기수복 고분자 등은 대부분 연질로 구성되는 반면, 본 연구는 기계적 물성이 뛰어난 경질 수지들을 기반으로 재가공 및 재활용을 성공적으로 시연함. 체계적으로 조사된 경질 비트리머 연구는 학술적으로도 매우 희귀하며, 산업적 응용성이 높음.

- **최고 수준의 열전도도 확보(고기능성)**: 유기계 소재는 본질적 구조의 한계로 인해 낮은 열전도도를 가지나, 본 성과는 자기조립이 가능한 중합성 액정 기반의 0.6 W/m·K 이상의 등방성 열전도도를 확보함. 이는 벌크 고분자 기준 세계 최고 수준의 90% 달성, 상용 에폭시 대비 3배 이상 우수한 성능임. 이와 동시에 내열성, 경도, 재활용성 등도 모두 확보하여, 고기능성과 지속 가능성이라는 상반된 요구를 동시 충족함.

○ (의의)

- 본 성과는 고기능성과 친환경성을 동시에 갖춘 신규 열경화성 고분자 소재를 개발한 성과로, 두 상반특성 부여를 위한 설계부터 응용까지 전 과정을 포괄하여 과학기술적 의의가 큼. 또한, 기존 친환경 고분자의 한계였던 물성 부족과 기능성 결여를 극복하며, 산업 적용성과 지속가능성 측면에서도 높은 가치를 지님.

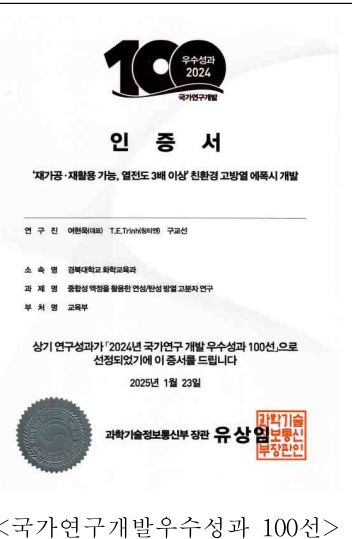

4. 연구개발 실적

(1) 업적 총괄 (단위:건)

논문	SCIE 등재 학술지				h-index		
	제1저자	공동저자	교신저자	소계	Web of Science	Google Scholar	SCOPUS
	14	35	24	73	23	25	24
특허	국내		국외		기술이전	연구 보고서	저서
	등록		등록				
	33		12				

*h-index 증빙자료(화면캡처본) 제출.

(2) 대표논문 목록 (5편), 신진학술상의 경우 3편

제 목	발표지명	Impactor factor (JCR2024)	발표 년도	역할(저자)	저자수 (명)	피인용 횟수
Reprocessable and Chemically Recyclable Hard Vitrimers Based on Liquid-Crystalline Epoxides	Advanced materials	26.8	2023	교신	3	42
Design and Evaluation of a Reprocessable Bismaleimide Thermoset: Enhancing Functionality and Sustainability Compatibility	ACS Macro Letters	5.2	2024	교신	3	1
Solvent-free and one-step fast fabrication of a side-chain liquid crystalline network	Chemical Engineering Journal	13.2	2025	교신	3	-

*제목 및 저자를 확인할 수 있는 증빙자료 제출.

(3) 총괄연구업적 목록

□ 학술지 논문 - SCIE 등재지에 한함

제 목	발표지명	Impactor factor (JCR2024)	발표 년도	역할(저자)	저자수 (명)	피인용 횟수
High-temperature insulating polyimide aerogels with a hierarchical porous hyper-cross-linked structure derived from aqueous polymerization of mesostructured silica-grafted Poly(amic acid) salt	Polymer Testing	6.0	202506	공동	6	-
Effect of Alkyl Chain Tail on Thermal Conductivity and Physical Properties of Side-Chain Liquid Crystalline Polymers	Macromolecular Chemistry and Physics	2.7	202506	교신	5	1
Solvent-free and one-step fast fabrication of a side-chain liquid crystalline network	Chemical Engineering Journal	13.2	202504	교신	3	-
Thermal Conductivity in Side-Chain Liquid-Crystal Epoxy Polymers: Influence of Mesogen Structure	Macromolecular Rapid Communications	4.3	202504	교신	3	2
Molecular Orientation and Thermal Conductivity in Liquid Crystalline Epoxy Resins by Anionic Ring Opening Polymerization	Industrial & Engineering Chemistry Research	3.9	202411	교신	2	2
Effect of Flexible Chains on Thermal Conductivity of Liquid Crystalline Epoxy Resins	ACS Applied Polymer Materials	4.7	202411	교신	2	4
Curing Kinetics of Ultra-High-Temperature Thermosetting Polyimides Based on Phenylethynyl-Terminated Imide Oligomers with Different Backbone Conformations	ACS Applied Polymer Materials	4.7	202411	공동	8	—
Dependence of Thermal Conductivity and Reprocessability on Polymerization System for Liquid Crystalline Epoxy Vitrimers	ACS Applied Polymer Materials	4.7	202411	교신	3	4
Phenylethynyl-Terminated Imide Oligomer-Based Thermoset Resins	Polymers	4.9	202410	공동	8	1

Consideration of molecular weight-dependent high thermal resistance of end-capped-oligoimide based thermoset resins	Polymer Testing	6.0	202411	교신	10	1
Design and Evaluation of a Reprocessable Bismaleimide Thermoset: Enhancing Functionality and Sustainability Compatibility	ACS Macro Letters	5.2	202410	교신	3	1
Exploring Novel Quorum Quenching Strain: Enhanced Disrupting Autoinducer-2 Bacterial Communication to Combat Biofouling in Membrane Bioreactor for Wastewater Treatment	Chemical Engineering Journal	13.2	202404	공동	9	6
Structural Effect of Cyclic Olefin Cross-linker on Long-wave Infra-red Transmitting Sulfur Polymers	Macromolecules	5.2	202403	공동	6	6
Enhancement of Thermal Conducting Properties in Epoxy Thermoset Systems Using an Aligned Liquid-Crystalline Mesophase	Materials Advances	4.7	202402	교신	2	10
Long-wave infrared transparent sulfur polymers enabled by symmetric thiol cross-linker	Nature Communications	15.7	202305	공동	7	43
Reprocessable and Chemically Recyclable Hard Vitrimers Based on Liquid-Crystalline Epoxides	Advanced Materials	26.8	202303	교신	3	42
Phase-controllable topochemical polymerization of liquid crystalline epoxy according to spacer length	Polymer Chemistry	3.9	202302	교신	2	9
Catalytic performance of tridentate versus bidentate Co(II) complexes supported by Schiff base ligands in vinyl addition polymerization of norbornene	RSC Advances	4.6	202212	공동	7	7
Norbornene and methyl methacrylate polymerizations catalyzed by palladium(II) complexes bearing aminomethylpyridine and aminomethylquinoline derivatives	Journal of Molecular Structure	4.7	202209	공동	5	-

Vinyl-addition polymerizations of norbornene and methyl methacrylate by the palladium(II) complexes ligated by 2-iminomethylquinoline and 2-iminomethylpyridine derivatives	Inorganica Chimica Acta	3.2	202209	공동	6	6
Diacetylene-Containing Dual-Functional Liquid Crystal Epoxy Resin: Strategic Phase Control for Topochemical Polymerization of Diacetylenes and Thermal Conductivity Enhancement	Macromolecules	5.2	202206	교신	15	30
Correlation of self-assembly and thermal conducting properties of PEG-backbone polyether with a room temperature mesophase	Molecular Systems Design & Engineering	3.2	202205	교신	3	11
Highly Refractive Aromatic Polybenzoxazoles Derived from Sulfur-Containing Dibenzoyl Chlorides	ACS Applied Polymer Materials	4.7	202110	공동	4	1
Thermal Conducting Thermosets Driven by Molecular Structurally Enhanced Mesogen Interactions	ACS Applied Polymer Materials	4.7	202108	교신	2	22
One-pot synthesis for gradient copolymers via concurrent tandem living radical polymerization: mild and selective transesterification of methyl acrylate through Al(acac) ₃ with common alcohols	RSC Advances	4.6	202107	교신	8	2
Multifunctional aminoethylpiperazine-modified graphene oxide with high dispersion stability in polar solvents for mercury ion adsorption	Journal of Industrial and Engineering Chemistry	6.0	202010	주저자	6	11
Monomeric and tetrameric mercury(II) complexes with iodo and N ₂ O ₂ /N ₃ O ligands: Structure and blue luminescence	Inorganica Chimica Acta	3.2	202010	공동	5	7
Utilization of Catalytic Hardener 2PZ-CN for Improving Thermal Conductivity of DGEBA Epoxy Resin	Polymer(Korea)	0.3	202009	주저자(교신)	1	2

Curing Behavior of 4,4'-Diglycidyloxybiphenyl with p-Phenylene Diamine Derivatives	Macromolecular Research	3.4	202009	교신	2	11
The linkers in fluorene-labeled 2'-deoxyuridines affect fluorescence discriminating phenomena upon duplex formation	RSC Advances	4.6	202005	교신	4	-
Synthesis, crystal structure, and photoluminescent properties of mononuclear Er(III) and Yb(III) complexes showing near-infrared emission	Journal of Molecular Structure	4.7	202004	공동	5	5
Enhanced electrical conductivity of polymer nanocomposite based on edge-selectively functionalized graphene nanoplatelets	Composites Science and Technology	9.8	202003	공동	8	56
Highly Efficient Thermal Oxidation and Cross-linking Reaction of Catechol Functionalized Polyacrylonitrile Copolymer Composites for Halogen-free Flame Retardant	Composites Part B: Engineering	14.2	202003	공동	8	43
Curing Kinetics of Liquid Crystalline 4,4'-Diglycidyloxybiphenyl Epoxy with Various Diamines	Polymer	4.5	201904	주저자(교신)	1	25
Melt Processable Polyacrylonitrile Copolymer Precursors for Carbon Fibers: Rheological, Thermal, and Mechanical Properties	Journal of Industrial and Engineering Chemistry	6.0	201903	교신	8	32
Flame Retardant Epoxy Derived from Tannic Acid as Biobased Hardener	ACS Sustainable Chemistry & Engineering	7.3	201902	공동	8	152
Curing Kinetics of Liquid Crystalline 4,4'-Diglycidyloxybiphenyl Epoxy Cured with 4,4'-Diaminodiphenylsulfone	Polymer	4.5	201812	주저자(교신)	1	17
Enhanced Thermal Conductivity of Liquid Crystalline Epoxy Resin using Controlled Linear Polymerization	ACS Macro Letters	5.2	201810	교신	8	105

Molecular Design and Property Prediction of Sterically Confined Polyimides for Thermally Stable and Transparent Materials	Polymers	4.9	201806	공동	6	19
Synthesis and Characterization of Phosphorus- and Sulfur-containing Aromatic Polyimides for High Refractive Index	Polymer	4.5	201801	공동	5	39
Highly Soluble Polyimide based on Asymmetric Diamines containing Trifluoromethyl group for High Performance Dielectric Material	Macromolecular Research	3.4	201801	공동	5	40
Thermomechanical Behavior of Polymer Composites Based on Edge-selectively Functionalized Graphene Nanosheets	Polymers	4.9	201712	교신	3	24
A Facile Synthesis Method for Highly Water-Dispersible Reduced Graphene Oxide based on Covalently Linked Pyridinium Salt	Carbon	11.6	201709	공동	5	16
Synthesis and Characterization of New Diamines Containing Rigid Aromatic Ester Units as Curing Agent for High Performance Epoxy Resin	Macromolecular Research	3.4	201707	공동	7	1
Preparation and Formation Mechanism of Porous Carbon Cryogel	Microporous and Mesoporous Materials	4.7	201706	주저자	9	8
Wide Temperature Range Eutectic Mixtures of Liquid Crystalline Epoxies Bearing Diglycidyl Moieties in the Side Position of Molecules for High Thermal Conductive Resin	Polymer Chemistry	3.9	201704	주저자	8	55
Pyridine-Functionalized Graphene/ Polyimide Nanocomposites; Mechanical, Gas Barrier, and Catalytic Effects	Composites Part B: Engineering	14.2	201704	공동	10	48

Characteristic Correlation between Liquid Crystalline Epoxy and Alumina Filler on Thermal Conducting Properties	Composites Science and Technology	9.8	201703	주저자(교신)	7	100
Construction and Properties of a Light-Harvesting Antenna System for Phosphorescent Materials based on Oligofluorene-Tethered Pt-Porphyrins	RSC Advances	4.6	201702	주저자	3	8
Development of Highly Thermal Conductive Liquid Crystalline Epoxy Resins for High Thermal Dissipation Composites	Composites Research	0.4	201702	공동	8	12
Thermomechanical and Optical Properties of Molecularly Controlled Polyimides Derived from Ester Derivatives	Polymer	4.5	201701	공동	10	41
Tunable Optical Property between Pure Red Luminescence and Dual Emission Depended on the Length of Light-Harvesting Antennae in the Dyads Containing the Cardo Structure of BODIPY and Oligofluorene	Macromolecules	5.2	201612	주저자	3	24
Synthesis and Characterization of Colorless Polyimides derived from 4-(4-aminophenoxy)-2,6-dimethylaniline	Macromolecular Research	3.4	201612	공동	7	30
A Facile Method for Transparent Carbon Nanosheets Heater based on Polyimide	RSC Advances	4.6	201605	공동	9	31
Preparation of UV-Curable Acryl Resin for High Refractive Index Based on 1,5-Bis[(2-acryloylenethyl)-3,4-ethylenedithiophene	European Polymer Journal	6.3	201602	공동	6	28
Synthesis and Characterization of Highly-Fluorinated Colorless Polyimides Derived from 4,4'-((Perfluoro-[1,1'-biphenyl]-4,4'-diyl)bis(oxy))bis(2,6-dimethylaniline) and Aromatic Dianhydrides	Polymer	4.5	201510	주저자	4	93

Synthesis and Characterization of Poly(cyclohexylthioacrylate) (PCTA) with High Refractive Index and Low Birefringence for Optical Applications	Macromolecular Research	3.4	201510	공동	8	8
Energy Transfer through Heterogeneous Dyes-Substituted Fluorene-Containing Alternating Copolymers and Their Dual-Emission Properties in the Films	Journal of Polymer Science Part A: Polymer Chemistry	3.6 (통합 JPS 기준)	201509	주저자	3	18
Synthesis and Characterization of High Refractive Index Polyimides Derived from 2,5-Bis(4-Aminophenylenesulfanyl)-3,4-Ethylenedithiophene and Aromatic Dianhydrides	Journal of Polymer Science Part A: Polymer Chemistry	3.6 (통합 JPS 기준)	201504	주저자	7	31
Grafting of Polyimide onto Chemically-Functionalized Graphene Nanosheets for Mechanically-Strong Barrier Membranes	Chemistry of Materials	7.0	201503	주저자	8	75
Synthesis of Dual-Emissive Polymers Based on Ineffective Energy Transfer through Carbo Fluorene-Containing Conjugated Polymers	Polymer	4.5	201503	주저자	3	39
Synthesis and Preparation of Alkyl-functionalized Graphene Oxide/Polyimide Nanocomposites	Macromolecular Research	3.4	201412	주저자	9	5
Synthesis of Microcellular Polypyrrole in a Unidirectional Freeze-Dried Polystyrene Template and the Conversion to Microcellular Carbon via Morphology-Retaining Carbonization	Synthetic Metals	4.6	201410	주저자	6	8
Construction of Multi-N-Heterocycle-containing Organic Solvent-Soluble Polymers with 1,3,4,6,9b-Pentaazaphenylene	Polymer Journal	2.7	201410	주저자	4	17
Preparation of Porous Carbon Materials by using Coagulated Polyamic Acid Precursor	Macromolecular Research	3.4	201410	공동	5	3

The Mechanical and Electrical Properties of Carbon Nanotube-Grafted Polyimide Nanocomposites	Journal of Polymer Science Part B: Polymer Physics	3.6 (통합 JPS 기준)	201407	공동	10	12
Synthesis and Characterization of Polybenzoxazole/Graphene Oxide Composites via in situ Polymerization	Carbon Letters	5.8	201310	공동	7	9
Dispersion and Magnetic Field-Induced Alignment of Functionalized Carbon Nanotubes in Liquid Crystals	Synthetic Metals	4.6	201310	공동	10	46
Synthesis and Tuning of Optical Properties of Conjugated Polymers involving Benzo[h]quinoline-based Neutral Pentacoordinate Organosilicon Complexes in the Mainchain	Polymer Chemistry	3.9	201310	공동	4	23
Chemical Method for Improving both the Electrical Conductivity and Mechanical Properties of Carbon Nanotube Yarn via Intramolecular Cross-Dehydrogenative Coupling	ACS Applied Materials & Interfaces	8.2	201308	공동	10	24
Effective Light Harvesting Antennae Based on BODIPY Tethered Cardo Polyfluorenes via Rapid Energy Transferring and Low Concentration Quenching	Macromolecules	5.2	201304	주저자	3	61
Isolation of π -Conjugated System through Polyfluorene from Electronic Coupling with Side-Chain Substituents by Cardo Structures	Journal of Polymer Science Part A: Polymer Chemistry	3.6 (통합 JPS 기준)	201211	주저자	3	27
Synthesis of Benzo[h]quinoline-Based Neutral Pentacoordinate Organosilicon Complexes	Chemical Communications	4.2	201209	공동	4	24

□ 등록된 국내외 특허

제 목	등록번호	등록년도	등록처	역할
"Compound having thermotropic liquid crystalline structure and polyethylene glycol polymer thereof	JP7675460	202505	일본	
METHOD AND COMPOSITION FOR SWELLING PRETREATMENT BEFORE DECOMPOSITION OF CURED THERMOSETTING RESIN MATERIALS	EP3153543	202309	유럽	
METHOD AND COMPOSITION FOR DEPOLYMERIZATION OF CURED EPOXY RESIN MATERIALS	EP3121220	202108	유럽	
Liquid crystalline epoxy compound with terminal mesogen connected by flexible linkage and method for preparing the same	US10975307	202104	미국	
Method and composition for depolymerization of cured epoxy resin materials	CN106366343	202012	중국	
METHOD FOR RECOVERING FIBER ASSEMBLY FROM THERMOSETTING RESIN COMPOSITE MATERIALS AND RECOVERED FIBER ASSEMBLY THEREBY	EP03178874	201908	유럽	
DEPOLYMERIZATION METHOD FOR EPOXY RESIN CURED MATTER AND COMPOSITION	JP6510469	201904	일본	
Method and composition for depolymerization of cured epoxy resin materials	US10280534	201905	미국	
Method and composition for depolymerization of epoxy resin cured article using transition metal salt or transition metal oxide	JP6491257	201903	일본	
Composition and method for depolymerization of cured epoxy resin materials using transition metal salts	US10106421	201810	미국	
Transparent and heat-insulating material including polymer capsule and method for preparing the same	US9950340	201804	미국	
Transparent heat insulation material containing polymer capsule, and method for preparing the same	JP6249924	201712	일본	
Compound having thermotropic liquid crystalline structure and polyethylene glycol polymer thereof	10-2841887	202507	한국	
Liquid-Crystalline Epoxy Resin Composition and Cured Product Thereof for Heat Dissipation Material	10-2784877	202503	한국	
Reprocessible or Recyclable Cured Liquid Crystalline Epoxy Resin, The Recured Materials Thereof, and Manufacturing Method Thereof	10-2760680	202501	한국	

Manufacturing method for multifunctional epoxy compounds having multiple liquid crystalline cores	10-2661076	202404	한국	
Multifunctional epoxy compounds having multiple liquid crystalline cores and cured products prepared therefrom	10-2627938	202401	한국	
Complex Catalyst Containing Amine Ligand for Polymerization of Cyclic Olefin and Method for Preparing Cyclic Olefin Polymer Using the Same	10-2609270	202311	한국	
Multifunctional epoxy compounds having multiple liquid crystalline cores and cured products prepared therefrom	10-2534225	202305	한국	
Palladium Complex Catalyst Containing Imine Ligand for Polymerization of Cyclic Olefin and Method for Preparing Cyclic Olefin Polymer Using the Same	10-2520084	202304	한국	
Cobalt Complex Catalyst Containing Imine Ligand for Polymerization of Cyclic Olefin and Method for Preparing Cyclic Olefin Polymer Using the Same	10-2486898	202301	한국	
A catalyst composition of bis-pyrazole based cobalt complex for the addition polymerization of cyclic olefins	10-2486813	202301	한국	
Composite material comprising silane-based sizing agent and method for preparing thereof	10-2403343	202205	한국	
Phosphorous-based diamine compound, polyamic acid prepared therefrom the phosphorous-based diamine compound, polyimide prepared therefrom, and polyimide film including polyimide	10-2109931	202005	한국	
Method and composition for depolymerization of cured epoxy resin materials	10-1978772	201905	한국	
Diamine compound having improved transparency, light transmittance and heat resistance, polymer prepared therewith and polyimide film containing the polymer	10-1965618	201903	한국	
Diamine compound, polyamic acid prepared therefrom, polyimide prepared therefrom, and polyimide film including polyimide	10-1943516	201901	한국	
Perfluorophenylene-based diamine compound, polymer prepared therewith and polyimide film containing the polymer	10-1926667	201812	한국	
Amine-based compound, polymer formed therefrom, and optical film comprising the same	10-1912458	201810	한국	
Polyimide nanocomposite, preparing method thereof, and composite membrane including the composite	10-1912459	201810	한국	

Method and composition for swelling pretreatment before decomposition of cured thermosetting resin materials	10-1900338	201809	한국	
Method and composition for swelling pretreatment before decomposition of cured thermosetting resin materials	10-1899088	201809	한국	
Method and apparatus for repairing compsoite material using solvation process	10-1863276	201805	한국	
Method and composition for depolymerization of cured epoxy resin materials	10-1861095	201805	한국	
Method and apparatus for recovering fiber assembly from thermosetting resin composite materials and recovered fiber assembly	10-1801788	201711	한국	
Transparent and heat-insulating material including polymer capsule and method for preparing the same	10-1794710	201711	한국	
Composition and Method For Depolymerization Of Cured Epoxy Resin Using Transition Metal Salts	10-1781835	201709	한국	
Ultrafine carbon fibers and their preparation method	10-1726822	201704	한국	
Diamine compound, polymer prepared therewith and polyimide film containing the polymer	10-1704537	201702	한국	
Nanocarbon composite carbon fiber with low cost and high performance and their preparation method	10-1689861	201612	한국	
Polymer-Carbon compound composite material and method for preparing thereof	10-1661598	201609	한국	
Method for preparing porous carbon material using coagulation and porous carbon material prepared thereby	10-1660330	201609	한국	
Carbon materials derived from mercerized cotton fiber and the method for preparing the same	10-1624860	201605	한국	
Surface-functionalized carbon material and method for preparing the same	10-1580561	201512	한국	
Liquid crystal film having different reflecting region of light according to external environment condition and method for manufacturing the same	10-1568217	201511	한국	

대표논문 증빙자료

3편

1. Trinh, T. E.; Ku, K.; Yeo, H.*, “Reprocessable and Chemically Recyclable Hard Vitrimers Based on Liquid-Crystalline Epoxides”, *Adv. Mater.*, **2023**, 35, 2209912.
2. Hoang, V.-K.; Ku, K.; Yeo, H.*, “Design and Evaluation of a Reprocessable Bismaleimide Thermoset: Enhancing Functionality and Sustainability Compatibility”, *ACS Macro Lett.*, **2024**, 13, 1279-1285.
3. Trinh, T. E.; Ku, K.*; Yeo, H.*, “Solvent-free and one-step fast fabrication of a side-chain liquid crystalline network”, *Chem. Eng. J.*, **2025**, 510, 161699.

Reprocessable and Chemically Recyclable Hard Vitrimers Based on Liquid-Crystalline Epoxides

Thi En Trinh, Kyosun Ku, and **Hyeonuk Yeo***

The rapid increase in demand for recyclable and reusable thermosets has necessitated the development of materials with chemical structures that exhibit these features. Thus, functional mesogenic epoxide monomers bearing both ester and imine groups that can be vitrimerized and recycled are reported herein. The compounds show mesophase characteristics at 100–200 °C and can be converted into hard epoxides by a common curing reaction. The obtained hard epoxides have high isotropic thermal conductivity ($\approx 0.64 \text{ W m}^{-1} \text{ K}^{-1}$), which is derived from their highly ordered microstructures. The cured products can be easily reprocessed through imine metathesis and transesterification, and decomposed products can be obtained through imine hydrolysis under acidic or basic conditions and subsequently be re-cured. Surprisingly, recycled materials can be repeatedly reprocessed or chemically decomposed. The reprocessed materials retain the properties of their pristine counterparts, and the recycled products preserve the advantages of the hard thermosets without alteration to any of their unique properties. A dehydration reaction occurs between the residual hydroxyl groups during the re-hardening, which dramatically increases the glass transition temperature by $\approx 60 \text{ °C}$. These reprocessable and recyclable vitrimers demonstrate the effectiveness and environmental friendliness of the molecular design strategy reported herein.

insoluble and infusible after curing, which hinders their reprocessing and recycling, thereby leading to environmental problems.^[4–6] To solve this reuse-related issue, numerous studies have recently been conducted on thermosetting resins that behave as thermoplastic resins when their crosslinked structure dissociates under certain conditions owing to their dynamic crosslinking covalent bonds.^[7–9] These new-class polymers, which were named vitrimers in 2011, have monomers that contain two or more polymerizable functional groups, one of which comprises reactive functional groups capable of reversibly crosslinking and dissociating under certain conditions.^[10–12] Alternatively, vitrimers can be designed by introducing a dynamic crosslinking functional group to thermoplastic polymers.^[13–16] Commonly used dynamic crosslinking functional groups include esters,^[17,18] carbonates,^[19] urethanes,^[20] and disulfides.^[21] Additionally, the topological freezing temperature (T_v), which is the temperature at which the melt viscosity reaches 10^{12} Pa s , can be

tuned depending on the system design parameters, such as the chemical structure and the presence or absence of a catalyst.^[22,23] Vitrimers possess the mechanical durability of thermosetting resins at temperatures below T_v and have potential utility as environmentally friendly, innovative materials because of their processability and recyclability at temperatures above T_v .^[24,25]

However, existing cutting-edge materials typically exhibit a trade-off relationship between their environmental friendliness and functionality. Therefore, materials such as vitrimers, which have been found to show limitations in fundamental investigations, require enhancements in their electrical, optical, and thermal properties.^[26,27] Vitrimers essentially inherit the characteristics of the base thermosetting resin, because of which they exhibit properties such as adhesion and excellent insulation in the case of epoxy resin systems, as well as transparency and heat resistance in the case of acrylic resin systems.^[3,28] Additionally, most vitrimers including urethane resin systems can serve as advanced stimulus-responsive materials owing to their elasticity.^[29,30] From the viewpoint of applying plastics in promising industries, vitrimers can facilitate the development of advanced electronic products. In this regard, the development of vitrimers for composite materials and improvement of their properties are underway, with their heat dissipation characteristics, in particular, requiring enhancements for use in small and

1. Introduction

Thermosetting resins such as epoxy resins exhibit several excellent properties, facilitate the fabrication of composite materials, and are extensively used in a diverse range of materials ranging from daily-use substances to aerospace materials.^[1–3] However, unlike thermoplastic resins, most thermosetting resins are

T. E. Trinh
Department of Science Education
Kyungpook National University
80, Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea

K. Ku
Department of Chemistry Education
Kyungpook National University
80, Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea

H. Yeo
Department of Chemistry Education & Department of Science Education
& Department of Pharmacy
Kyungpook National University
80, Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea
E-mail: yeo@knu.ac.kr

 The ORCID identification number(s) for the author(s) of this article can be found under <https://doi.org/10.1002/adma.202209912>.

DOI: 10.1002/adma.202209912

Design and Evaluation of a Reprocessable Bismaleimide Thermoset: Enhancing Functionality and Sustainability Compatibility

Van-Kien Hoang, Kyosun Ku, and Hyeonuk Yeo*



Cite This: *ACS Macro Lett.* 2024, 13, 1279–1285



Read Online

ACCESS |



Metrics & More




Article Recommendations



Supporting Information

ABSTRACT: Bismaleimide (BMI) resins are high-performance thermosets that are primarily used in aerospace because of their exceptional heat resistance and physical properties. However, their growing demand has led to significant environmentally unfriendly waste. To address this, our research proposes a reprocessable BMI system using a newly synthesized BMI vitrimer (BMIV) with functional groups that form covalent adaptable networks (CANs). To enhance the properties, a symmetrical BMI with two ester groups introduced into the rigid rod molecule was designed as a CAN component. After confirming the structure using various spectroscopic techniques, BMIV was coupled with aromatic diamines via an additional aza-Michael reaction to obtain the cured resins. Subsequently, the mechanical properties and reprocessing behavior of the thermally stable and optimized thermosetting material with the best performance were evaluated, and the evidence, mechanism, and activation energy of the topology rearrangement are reported in detail.

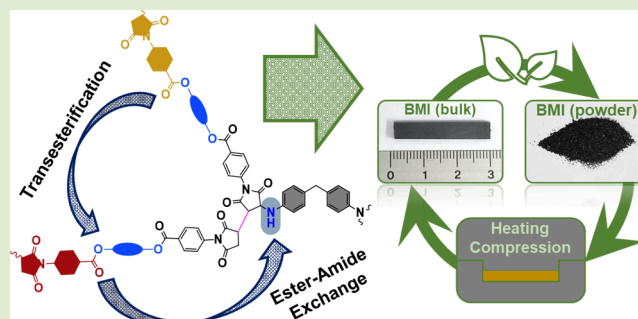

Thermosets are a family of polymers categorized by their profound thermal and mechanical durability, which makes them favorable for use in intense working environments.^{1,2} These characteristics stem from the irreversible and stable three-dimensional networks formed through covalent bonds as cross-links between linear polymer chains.³ Thermosets include epoxies, bismaleimides (BMIs), unsaturated polyesters, and polyurethane. Among these, BMI resins have been recognized as a high-performance material that possesses properties strictly required for aerospace and aeronautic applications.⁴ These properties include high glass transition temperatures, high thermal and oxidative stability, excellent mechanical properties, a relatively low dielectric constant, and low moisture absorption.^{5–9}

In addition to these advantages, the irreversibility of the chemical structure of thermosetting polymers, particularly BMI resins, renders them incapable of being reprocessed or reshaped once cured, which results in cross-links.¹⁰ Consequently, even the smallest mistake during the shaping process or the spoilage of thermoset pieces causes these materials to become a permanent waste burden on the ecosystem.^{11,12} Generally, covalent adaptable networks (CANs) are incorporated to overcome the challenge of producing sustainable thermosets without sacrificing their most desirable properties.^{13–19} These networks feature dynamic linkages that can be exchanged under external stimuli, such as heat and pressure, making it possible for thermoset pieces such as vitrimers to be reprocessed and reused multiple times. Since their initial introduction by Leibler et al. over two

decades ago,²⁰ vitrimers have been extensively researched, and various methods of designing CANs have been explored. Vitrimers can undergo several chemistries, including transesterification, transalkylation, disulfide metathesis, transamination, transcarbamoylation, and imine exchange, with or without the use of a catalyst.^{21–24}

To date, researchers have reported numerous thermosetting materials that exhibit vitrimer-like behavior and leverage the advantages of CANs to demonstrate reprocessability, remoldability, reconfigurability, and self-healing ability.^{25–28} However, in the field of BMI resins, reports on BMI resins remain very limited even though there are many reports on utilizing maleimide as a component in Diels–Alder chemistry.^{29,30} Shibata's group developed reprocessable and self-healable BMI thermosets that contain disulfide bonds capable of undergoing thermally induced disulfide metathesis.^{31,32} Additionally, Ning et al. introduced synthetic curing agents for triple-shape memory BMI thermosets that can be remolded based on transesterification.³³ Their reports demonstrate reprocessability derived from curing systems designed for commercial BMIs. The issue is that the reported BMI systems face challenges,

Received: August 12, 2024

Revised: September 5, 2024

Accepted: September 12, 2024

Published: September 16, 2024





Solvent-free and one-step fast fabrication of a side-chain liquid crystalline network

Thi En Trinh^a, Kyosun Ku^{b,*}, Hyeonuk Yeo^{a,c,d,*}

^a Department of Science Education, Kyungpook National University, 80, Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea

^b Advanced Institute of Water Industry, Kyungpook National University, 80, Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea

^c Department of Chemistry Education, Kyungpook National University, 80, Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea

^d School of Applied Chemical Engineering, Kyungpook National University, 80, Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea

ARTICLE INFO

Keywords:

Liquid crystal
Elastomers
Epoxy
Crosslinker
Side-chain polymer
Thermal conductivity

ABSTRACT

Liquid crystal networks (LCNs) are advanced materials with applications in medical devices and aerospace owing to their reversible adhesion, shape memory, and self-healing properties. Traditional LCN synthesis involves acrylate-based liquid crystal (LC) monomers and photopolymerization; however, it has limitations such as oxygen sensitivity, shrinkage, and thickness constraints. Epoxy-based LCNs using anionic ring-opening polymerization overcome some of these issues but still face challenges such as the need for high-purity solvents and reduced thermal and mechanical properties due to short-chain polymers. Here, we present a solvent-free, one-step, fast-curing method for synthesizing LCNs via heat compression in an atmospheric environment. This process incorporates LC diepoxide (D), acting as a chain extender and crosslinker, with LC monoepoxide (M), forming the side-chain linear polymer. Imidazole initiates the curing reaction at LC temperatures, ensuring fast curing and optimized crystallinity, which successfully induces LCN formation. Increasing the D content improves chain extension or crosslinking, forming LCN networks with varying crosslinking densities. All samples exhibit thermal conductivity over $0.55 \text{ W m}^{-1} \text{ K}^{-1}$. Samples with a higher D content demonstrate superior mechanical properties and thermal stability. Notably, samples with a balanced epoxide ratio exhibit crystalline structures and the highest thermal conductivity. This method efficiently enables the cost-effective production of epoxy-based LCNs with customizable properties.

1. Introduction

Liquid crystalline networks (LCNs), which include liquid crystalline elastomers (LCEs) and liquid crystalline thermosets (LCTs), represent polymer classes with significant potential for advanced functional materials. These materials exhibit exceptional properties owing to their anisotropic shapes, making them suitable for applications in soft robotics, responsive surfaces, and photonics [1–4]. LCEs have a low crosslinking density, enabling high deformation, whereas LCTs exhibit greater rigidity due to higher crosslinking, thereby limiting their deformation. LC epoxy resins enhance properties such as fracture toughness, thermal stability, and moisture resistance [5–11].

LCNs can be produced using different starting materials and through different polymerization techniques. There are two primary methods commonly employed: one involves crosslinking liquid crystal side-chain linear polymers, while the other utilizes reactive LC monomers with

polymerizable groups such as acrylates. The former results in elastomeric properties, which are beneficial for actuators and sensors [12,13], whereas the latter produces highly crosslinked networks suitable for optical applications and soft robotics [14–19]. Photopolymerization, a frequently used technique in LCN production, encounters challenges such as light penetration issues, shrinkage, and sensitivity to oxygen [20]. To overcome these challenges, LC monomers containing epoxide groups are preferred over traditional acrylates due to their advantages such as reduced shrinkage, enhanced alignment, and the ability to undergo post-curing [21–26]. However, polymerizing reactive LC monomers through cationic ring-opening and ionic coordination pathways may lead to low yields and the formation of side products [27–31]. Anionic ring-opening polymerization using *t*-BuOK and 18-crown-6 can enhance control but still results in low yield and limitations in molecular weight [31–37]. Recent advancements have been made using LC epoxy monomers with short spacer chain lengths and low temperatures,

* Corresponding authors at: Department of Science Education, Kyungpook National University, 80, Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea.
E-mail addresses: kyosun9@knu.ac.kr (K. Ku), yeo@knu.ac.kr (H. Yeo).

<https://doi.org/10.1016/j.cej.2025.161699>

Received 23 December 2024; Received in revised form 17 February 2025; Accepted 16 March 2025

Available online 17 March 2025

1385-8947/© 2025 Elsevier B.V. All rights are reserved, including those for text and data mining, AI training, and similar technologies.

H-index 증빙자료

1. Web of Science
2. Google Scholar
3. SCOPUS

Yeo, Hyeonuk

This is an algorithmically generated author record. ⓘ

Korea Institute of Science & Technology (KIST) - Dept Sci Educ - JEONBUK, SOUTH KOREA

Identifiers

Web of Science ResearcherID: AHE-0397-2022

Published names ⓘ

Yeo, Hyeonuk Yeo, Hyeounk

Organizations ⓘ

Kyungpook National University (KNU)
Seoul National University (SNU)
Kyungpook Nat Tonal Univ
Korea Institute of Science & Technology (KIST)
Kyoto University

Subject Categories

Polymer Science; Chemistry; Materials Science; Engineering; Science & Technology - Other Topics

Documents Author Impact Beamplot

✓ Web of Science Core Collection (78)

Filters Select Filters

Author Position All Publications

Sort by Date: newest first

< 1 of 2 >



Hyeonuk Yeo

Associate Professor, Department of Chemistry Education, [Kyungpook National University](#)
[knu.ac.kr의 이메일 확인됨](#) - [홈페이지](#)

[Organic Materials](#) [Polymer Chemistry](#) [Thermosets](#) [Vitrimers](#) [Liquid Crystals](#)

제목	인용	연도
☐ Flame retardant epoxy derived from tannic acid as biobased hardener YO Kim, J Cho, H Yeo, BW Lee, BJ Moon, YM Ha, YR Jo, YC Jung ACS Sustainable Chemistry & Engineering 7 (4), 3858-3865	152	2019
☐ Enhanced thermal conductivity of liquid crystalline epoxy resin using controlled linear polymerization AM Islam, H Lim, NH You, S Ahn, M Goh, JR Hahn, H Yeo, SG Jang ACS Macro Letters 7 (10), 1180-1185	105	2018
☐ Characteristic correlation between liquid crvstalline enoxv and alumina filler on thermal	100	2017



Scopus

3. SCOPUS

This author profile is generated by Scopus ↗

Yeo, Hyeonuk

[Kyungpook National University \(KNU\)](#), Daegu, South Korea • Scopus ID: 55324816500 • [ID 0000-0003-2629-4353](#) ↗

[Show all information](#)

1,546
Citations by 1,203 documents

71
Documents

24
[h-index](#)

Set alert

Edit profile

More

Create your researcher profile

- Verify your publications
- Get alerted when your work is cited
- Showcase more than just your publications

Get started

Metrics

Profile summary

78 Total documents

78 Web of Science Core Collection publications

0 Preprints

Web of Science Core Collection metrics ⓘ

23 H-Index

78 Publications


1,477 Sum of Times Cited

1,144 Citing Articles

[View citation report](#)

인용 모두 보기

	전체	2020년 이후
서지정보	1739	1206
h-index	25	19
i10-index	42	33



Search

추천서 3부 (별도 송부)

1. 구본철 (한국과학기술연구원)
2. 김병수 (연세대학교)
3. 박치영 (대구경북과학기술원)